STANDARD FOR RESIDENTIAL CIRCULAR DRIVEWAYS

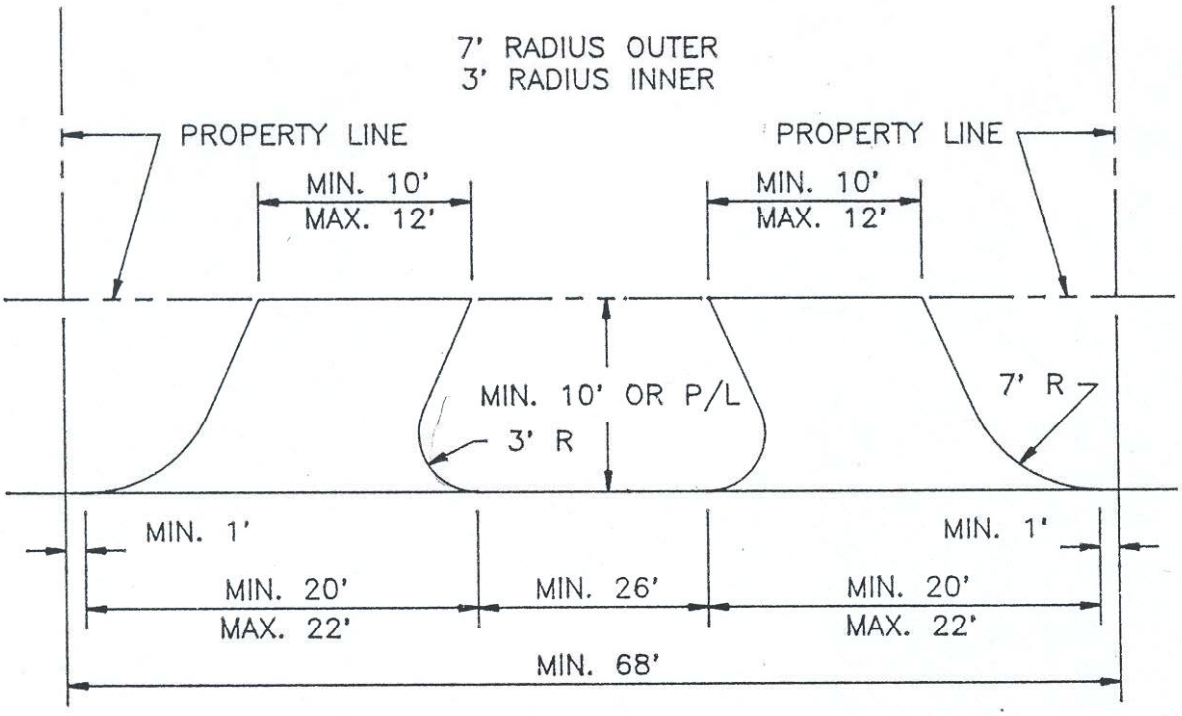

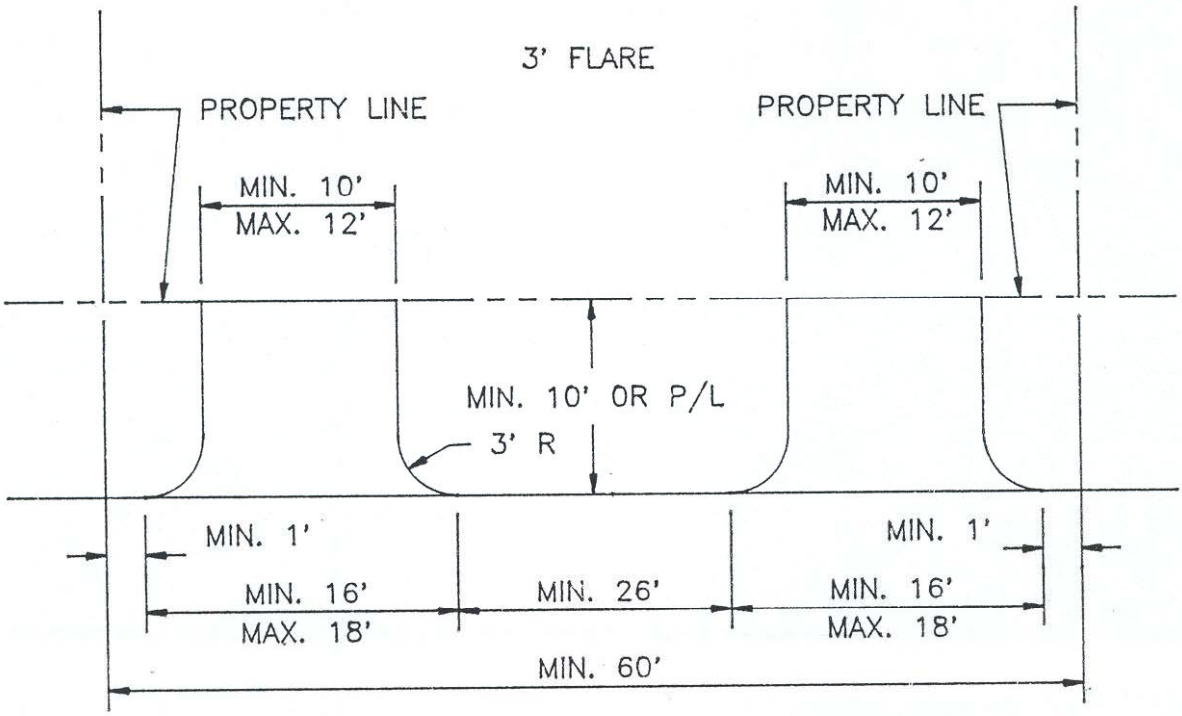

FIGURE 2–2

CALL: Sunshine State One Call 1–800–432–4770 48 Hours before digging.

NOTE: Material for construction of all driveways shall be either 6" thick 3000 p.s.i. concrete or 1–3/4" type I asphalt with 6" thick limerock base compacted 98% min.